



For SD7 and PTF7, Daisy Chain Coax To other panel (Coax supplied by Nevco)

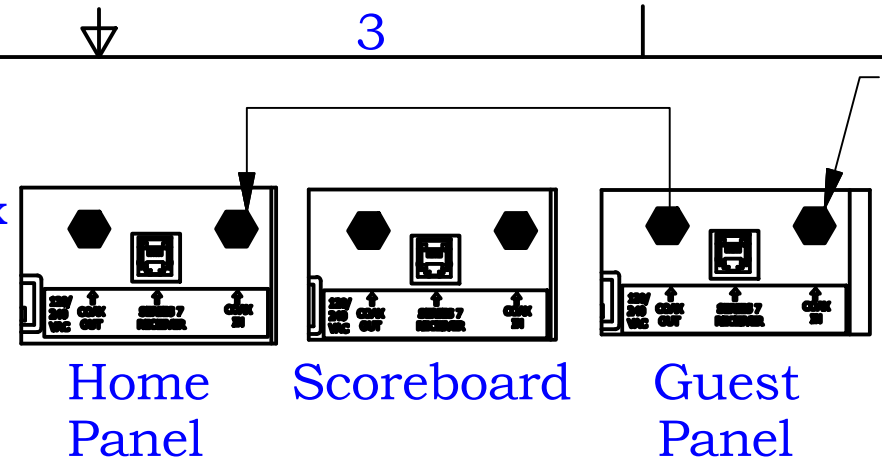

Coax IN From Control or W6/X Receiver

For F712/F715, Daisy Chain Coax To all three Coax supplied by Nevco

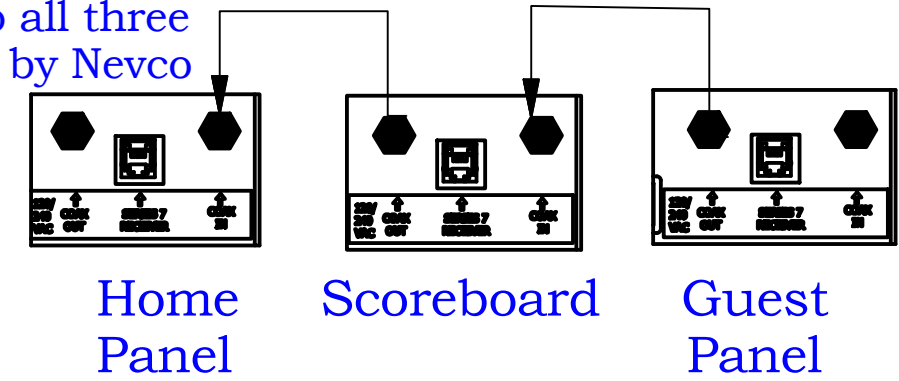

Model	Amps (120VAC)				Amps (240VAC)				A	B		C		D	E	F	G	Hanging Weight
	-NL	-RL	-ETN-NL	-ETN-RL	-NL	-RL	-ETN-NL	-ETN-RL		w/ 8'	w/ 12'	w/ 8'	w/ 12'					
SD7-5	0.9	1.0	1.0	1.1	0.5	0.5	0.5	0.6	12 1/2	65 1/2	84 1/2	144 1/2	129 1/2	71	36	9	6	180 lbs.
SD7-9	1.5	1.7	2.0	2.1	0.8	0.9	1.0	1.1	20 1/2	89 1/2	108 1/2	176 1/2	224 1/2	95	60	9	6	308 lbs.
PTF7	1.1	1.3	1.4	1.5	0.6	0.7	0.7	0.8	20 1/2	89 1/2	108 1/2	176 1/2	224 1/2	80 1/2	60	9	6	200 lbs.
F712	0.4	0.4	0.4	0.4	0.2	0.2	0.2	0.2	9 7/8	50 1/4	89 1/4	126 5/8	174 5/8	80 1/2	20 3/4	2	3	108 lbs.
F715	0.4	0.5	0.4	0.5	0.2	0.3	0.2	0.3	9 7/8	50 1/4	89 1/4	126 5/8	174 5/8	97 1/2	20 3/4	2	3	130 lbs.

**Amperages and Weights listed above are totals for both panels within a set

Notes:

1. Lifting Point 3/8"-16 Eyebolts can be threaded into the lifting point to lift the scoreboard for mounting or for suspension mount. Eyebolts can be removed after the scoreboard is mounted.
2. Mount Scoreboard securely using 3/8" bolts or anchors using the existing mounting holes or drill 1/2" alternate locations.
3. This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electric Code and/or other applicable codes. This includes proper grounding and bonding of the sign.
4. Connect Coax from control point or receiver to Home input, then daisy chain supplied coax cable from output to Guest input. For convenience, Guest may be connected first by connecting to Guest input and going from output to Home input. See "Signal Connections"

SD7, PTF7, and F7 Installation			
		Nevco, Inc. Greenville, Illinois 62246	
Last ECO		Drawing No. 241-0293	
Drawn	Date	Sheet 1 of 1	
DLP	4/6/2017		