


MODEL 9715

Size: 14.25" x 10.25" x 1.5" (.36 x .26 x .038 meters)

Approximate hanging weight: 3.5 lbs. (1.6 kg)

Digit Size: 4.5" **Digit Color:** High Intensity Red and Amber

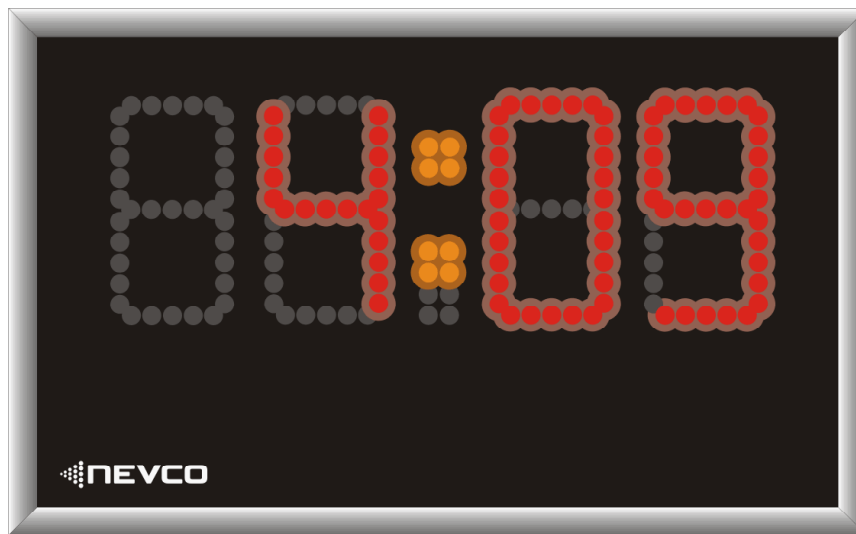

A great addition to any facility for better game time management!

- Displays operate without separate power source.
- Bright, long lasting, energy efficient LEDs.
- Displays same time as scoreboard timer.
- LED Colon and decimal automatically changes to 1/10th of a second.
- Brushed aluminum frame with high-impact protective face.
- Can be used as segment timer
- Time of Day display
- Daisy chain up to eight Locker Room Clocks with an Indoor Accessory Driver. (IAD)

Maximize your Impact with a Nevco Scoreboard, SCD-7A and End of Period lights.



MAXIMIZE YOUR IMPACT®

VISIT US ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS

Model 9715 (Indoor) Locker Room Clock

LOCKER ROOM CLOCK / CONTROL OPERATING FEATURES

MODEL 9715	MPC WIRED	MPCW WIRELESS	MPCX ₂ WIRELESS
TIMING 4.5" High Intensity Red & Amber LED Digits	Bi-directional UP or DOWN count. Down count from 99:59:59 and Up count to 59:59.	Bi-directional UP or DOWN count. Down count from 99:59:59 and Up count to 59:59.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.
TIME OF DAY	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". Time of day after control is turned off.
CONTROL CABLE	One (1) 25' coax and One (1) 25' Ethernet cable are included with Indoor Accessory Device (IAD). Other length order by the foot or per-terminated lengths.	N/A	N/A

AGENCY APPROVAL: FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 14.25"L x 10.25"H x 1.5"D (.36 x .26 x .038 meters), constructed of aluminum. Frame frosted silver, Plexi Face. Brackets provided for wall mounting. Weight approximately 3.5 lbs. (1.6 kg).

LED UNITS: Seven-bar segmented digits with high impact plastic

POWER: 120 VAC, .13 Amps, 50/60 Hz.

240 VAC, .07 Amps, 50/60 Hz. Requires earth ground.

POWER WITH REAR-LIT CAPTIONS: 120 VAC, .13 Amps, 50/60 Hz.

240 VAC, .07 Amps, 50/60 Hz. Requires earth ground.

(Foreign cord sets available)

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION

U.S. SERVICE: 1-800-851-4040

INTERNATIONAL SERVICE: 1-618-664-0360

CANADA SERVICE: 1-800-461-8550



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM