





MODEL PTF7

Size: 5' x 6' 7" x 8" (1.52 x 2.04 x .20 meters) each panel
Approximate hanging weight: 200 lbs. (91 kg) each set
Digit Size: 9" **Digit Color:** High Intensity Red & Amber

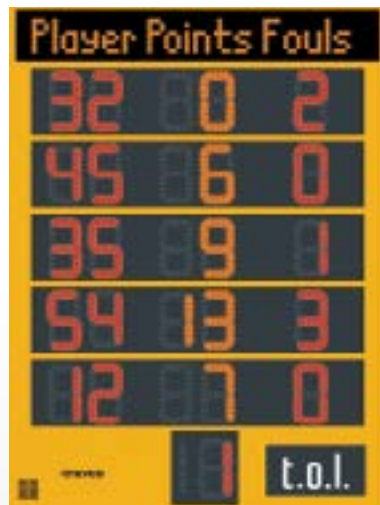

Advanced statistics display ideal for Basketball facilities.

- Energy-efficient LEDs reduce power consumption and operating expense.
- Ability to retrofit Electronic caption plates.
- Bright, Zero maintenance LED lamp banks when ordered with rear-lit captions.
- Durable and lightweight cabinet design.
- Built-in power factor correction.
- Includes basketball caption plates.

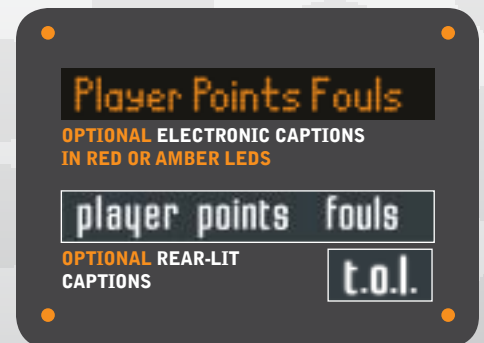

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS



Model PTF7 (Indoor) Basketball Stat Panel

SCOREBOARD/CONTROL OPERATING FEATURES

MODEL PTF7	MPC WIRED	MPCW WIRELESS	MPCX ₂ WIRELESS
PLAYER 9" High Intensity Red LED Digits	Displays 0-99. Basketball five (5) players.	Displays 0-99. Basketball five (5) players.	N/A
POINTS 9" High Intensity Amber LED Digits	Displays 0-99.	Displays 0-99.	N/A
FOULS 9" High Intensity Red LED Digits	Displays 0-9.	Displays 0-9.	N/A
HORN One in each cabinet	Can sound manually at any time.	Can sound manually at any time.	N/A
JUNCTION BOXES	Two (2) 4" x 2 1/8" x 2 1/8" with covers, furnished per scoreboard for installation.	N/A	N/A
CONTROL CABLE	One (1) length required of 2-WIRE (coaxial type) 1/4" diameter. Order length required.	N/A	N/A

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

PANEL (EACH): Size 5"W x 6'7"H x 8"D (1.52 x 2.04 x .20 meters), constructed of aluminum. Brackets provided for wall mounting. Hanging weight approximately 100 lbs. (45 kg).

CAPTIONS: PLAYER, POINTS, FOULS, white 6" letters. (Omitted when ordered with Electronic Captions.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

POWER (SET) WITH NON-LIT CAPTIONS: 120 VAC, 1.1 Amps, 50/60 Hz. / 240 VAC, .6 Amps, 50/60 Hz. Requires earth ground.

POWER (SET) WITH REAR-LIT CAPTIONS: 120 VAC, 1.3 Amps, 50/60 Hz. / 240 VAC, .7 Amps, 50/60 Hz. Requires earth ground.

POWER (SET) WITH ETNS: 120 VAC, 1.4 Amps, 50/60 Hz. / 240 VAC, .7 Amps, 50/60 Hz. Requires earth ground.

POWER (SET) WITH REAR-LIT CAPTIONS AND ETNS: 120 VAC, 1.5 Amps, 50/60 Hz. / 240 VAC, .8 Amps, 50/60 Hz. Requires earth ground.

BUILT-IN LIGHTNING PROTECTION: All models feature optical isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION

U.S. SERVICE: 1-800-851-4040

INTERNATIONAL SERVICE: 1-618-664-0360

CANADA SERVICE: 1-800-461-8550



BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM