




# MODEL 1600



**Size:** 16' x 5' x 8" (4.88 x 1.52 x .20 meters)


**Approximate hanging weight:** 260 lbs. (118 kg) **With ETNs:** 315 lbs. (143 kg)

**Digit Size:** 18" **Digit Color:** High Intensity Red or Amber

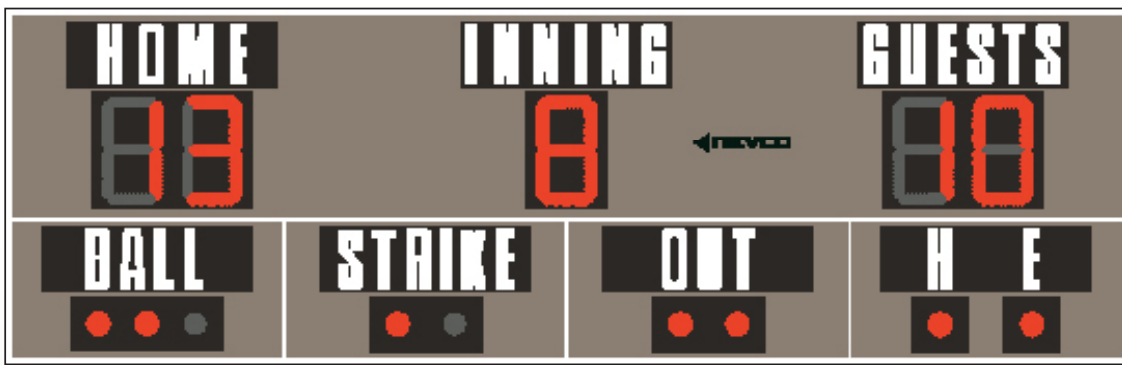

### Smaller scoreboard designed for combination Baseball/Softball facilities.

- Designed to withstand wind load speed zones exceeding 150 mph.
- Operate wired or wireless.
- Electronic Team Names (ETNs) available in place of Home and Guest caption plates.
- Includes Hit and Error Indicators.
- Large digits easily seen from long distances.
- White outline striping separates features for greatest readability.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Flexible mounting. Can mount directly to columns OR on laterals for complex or retro-fit installations.
- Flush sign mounting.

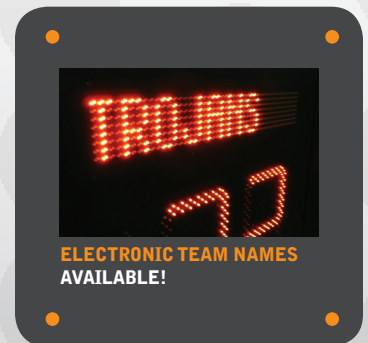

Combine your scoreboard with a Nevco message center or available accessories such as 9605 for timed games or Pitch Speed/Pitch Count add-ons to create a complete scoring and display system. Team/Sponsor signs also available.

# INTEGRATED DISPLAY AND SCORING SOLUTIONS



## Model 1600 (Outdoor) Baseball/Softball Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 1600	MPC(W)-4/5/6	MPCW-7	MPCX <sub>2</sub> WIRELESS
<b>TEAM SCORES</b> 18" High Intensity Red or Amber LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
<b>INNING</b> 18" High Intensity Red or Amber LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>INDICATORS</b> 3" diameter High Intensity Red or Amber LED cluster	THREE FOR BALL TWO FOR STRIKE TWO FOR OUT ONE FOR HIT ONE FOR ERROR	THREE FOR BALL TWO FOR STRIKE TWO FOR OUT ONE FOR HIT ONE FOR ERROR	THREE FOR BALL TWO FOR STRIKE TWO FOR OUT ONE FOR HIT ONE FOR ERROR
<b>PITCH COUNT</b>	N/A	Supported. Integrates with PCD display. Controlled by hand-held switches.	Supported. Integrates with PCD display. Requires Pitch Count MPCX <sub>2</sub> control.
<b>PITCH TIMER</b>	N/A	Supported. Integrates with 9520 display. Controlled by hand-held switches.	Supported. Integrates with 9520 display. Requires SCD/DGT MPCX <sub>2</sub> control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size 16'L x 5'H x 8"D (4.88 x 1.52 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 260 lbs. (118 kg) or 315 lbs. (143 kg) with ETNs.

**CAPTIONS:** HOME, GUESTS, INNING, BALL, STRIKE, OUT, H, E, white letters 10" high. (HOME and GUESTS are omitted when ordered with ETNs.)

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**POWER WITH ETNS:** 120 VAC, 1.7 Amps, 50/60 Hz. / 240 VAC, 0.9 Amps, 50/60 Hz. Requires earth ground.

**POWER WITHOUT ETNS:** 120 VAC, .8 Amps, 50/60 Hz. / 240 VAC, 0.4 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [WWW.NEVCO.COM/INFO/GUARANTEE.PHP](http://WWW.NEVCO.COM/INFO/GUARANTEE.PHP)  
**U.S. SERVICE: 1-800-851-4040. INTERNATIONAL SERVICE: 1-618-664-0360. CANADA SERVICE: 1-800-461-8550.**



VISIT US ONLINE AT:

[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360  
 FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)