




MODEL 1604-PC

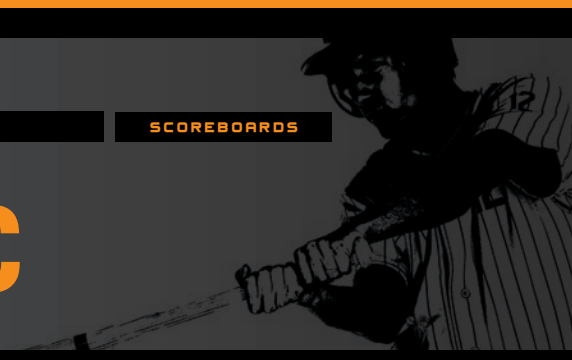

Size: 28' x 8' x 8" (8.53 x 2.44 x .20 meters)

Approximate hanging weight: 650lbs. (295 kg) **With ETNs:** 712 lbs. (323 kg)

Digit Size: 18"/14" **Digit Color:** High Intensity Red, Amber, or Translucent White

AT BAT		BALL		STRIKE		OUT		H	E						
33		3		2		2		4	0						
GUESTS		1	2	3	4	5	6	7	8	9	10	RUNS	HITS	ERRORS	PITCHES
0000000000		0	0	0	0	0	0	0	0	0	0	06	08	0	189
HOME		2	3	0	0	0	0	0	1	4	0	10	13	1	104

AT BAT		BALL		STRIKE		OUT		H	E						
33		3		2		2		4	0						
GUESTS		1	2	3	4	5	6	7	8	9	10	RUNS	HITS	ERRORS	PITCHES
0000000000		0	0	0	0	0	0	0	0	0	0	06	08	0	189
HOME		2	3	0	0	0	0	0	1	4	0	10	13	1	104

SHOWN WITH OPTIONAL WHITE LEDS

AT BAT		BALL		STRIKE		OUT		H	E						
33		3		2		2		4	0						
LIONS		1	2	3	4	5	6	7	8	9	10	RUNS	HITS	ERRORS	PITCHES
0000000000		0	0	0	0	0	0	0	0	0	0	06	08	0	189
TIGERS		2	3	0	0	0	0	0	1	4	0	10	13	1	104

SHOWN WITH OPTIONAL ELECTRONIC TEAM NAMES

Smaller inning-by-inning scoreboard designed for combination Baseball/Softball facilities.

- Designed to withstand wind load speed zones exceeding 180 mph.
- Operate wired or wireless.
- Includes Hit and Error Indicators.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Flush sign mounting.
- Conveniently tracks pitches for home and guest teams.

*Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS

Model 1604-PC (Outdoor) Baseball/Softball Scoreboard


SCOREBOARD/CONTROL OPERATING FEATURES



MODEL 1604-PC	MPCW WIRELESS	MPCX ₂ WIRELESS
LINE SCORES 14" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9 for ten (10) innings.	Displays 0-9 for ten (10) innings.
RUNS 14" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99. Total runs accumulate for up to 30 innings as each inning score is entered.	Displays 0-99. Total runs accumulate for up to 19 innings as each inning score is entered.
HITS 14" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99.	Displays 0-99.
ERRORS 14" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9.	Displays 0-9.
AT BAT 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99.	Displays 0-99.
BALL 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays Blank-9.	Displays Blank-9.
STRIKE 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays Blank-9.	Displays Blank-9.
OUT 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays Blank-9.	Displays Blank-9.
H O R E 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays the letter H for hit or the letter E for error.	Displays the letter H for hit or the letter E for error.
PITCH COUNT	Displays 0-199	Displays 1-199 Requires Pitch Count MPCX ₂ Control
PITCH TIMER	Supported. Integrates with 9620 display. Controlled by hand-held switches.	Supported. Integrates with 9620 display. Requires SCD/DGT MPCX ₂ control.

* When operating scoreboard with an MPCX₂, both baseball/softball & pitch count MPCX₂ controllers are required. Cannot operate this scoreboard with an MPCW7 & MPCX₂ at the same time.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 28"L x 8"H x 8"D (8.54 x 2.43 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 650lbs. (295 kg) or 712lbs. (323 kg) with ETNs.

CAPTIONS: HOME, GUESTS, AT BAT, BALL, STRIKE, OUT, H, E, white letters 15" high. All other captions white letters 8" high. (HOME and GUESTS are omitted when ordered with ETNs.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

BUILT-IN LIGHTNING PROTECTION: All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

POWER WITH ETNS (RED/AMBER): 120 VAC, 4.9 Amps, 50/60 Hz. / 240 VAC, 2.5 Amps, 50/60 Hz. Requires earth ground.

POWER WITHOUT ETNS (RED/AMBER): 120 VAC, 3.5 Amps, 50/60 Hz. / 240 VAC, 1.8 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS (TRANSLUCENT WHITE): 120 VAC, 6.7 Amps, 50/60 Hz. / 240 VAC, 3.4 Amps, 50/60 Hz. Requires earth ground.

POWER WITHOUT ETNS (TRANSLUCENT WHITE): 120 VAC, 5.6 Amps, 50/60 Hz. / 240 VAC, 2.8 Amps, 50/60 Hz. Requires earth ground.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION/

U.S. SERVICE: 1-800-851-4040

INTERNATIONAL SERVICE: 1-618-664-0360

CANADA SERVICE: 1-800-461-8550

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM



MAXIMIZE YOUR IMPACT®