



# MODEL 1606



**Size:** 24' x 8' x 8" (7.32 x 2.44 x .20 meters)


**Approximate hanging weight:** 570 lbs. (259 kg) **With ETNs:** 632 lbs. (287 kg)

**Digit Size:** 14"/18" **Digit Color:** High Intensity Red or Amber

AT BAT	BALL	STRIKE	OUT	H	E													
37	3	2	2	4	0													
NEVCO						1	2	3	4	5	6	7	8	9	10	RUNS	HITS	ERRORS
GUESTS						0	0	1	1	1	1	1	0	0	0	6	8	0
HOME						2	3	0	0	0	0	0	1	4	0	8	13	1

### Smaller inning-by-inning scoreboard designed for combination Baseball/Softball facilities.

- Designed to withstand wind load speed zones exceeding 150 mph.
- Operate wired or wireless.
- Electronic Team Names (ETNs) available in place of Home and Guest caption plates.
- Includes Hit and Error Indicators.
- Large digits easily seen from long distances.
- White outline striping separates features for greatest readability.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Flexible mounting. Can mount directly to columns OR on laterals for complex or retro-fit installations.
- Flush sign mounting.

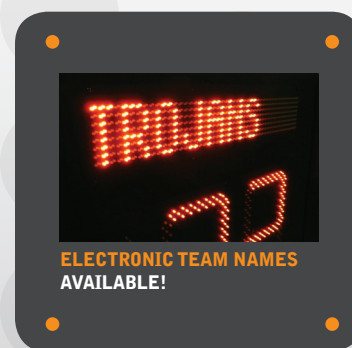

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:  
[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360  
FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)

# INTEGRATED DISPLAY AND SCORING SOLUTIONS



## Model 1606 (Outdoor) Baseball/Softball Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 1606	MPC(W)-4/5/6	MPCW WIRELESS	MPCX <sub>2</sub> WIRELESS
<b>LINE SCORES</b> 14" High Intensity Red or Amber LED Digits	Displays 0-9 for ten (10) innings.	Displays 0-9 for ten (10) innings.	Displays 0-9 for ten (10) innings.
<b>RUNS</b> 14" High Intensity Red or Amber LED Digits	Displays 0-99. Total runs accumulate for up to 30 innings as each inning score is entered.	Displays 0-99. Total runs accumulate for up to 30 innings as each inning score is entered.	Displays 0-99. Total runs accumulate for up to 19 innings as each inning score is entered.
<b>HITS</b> 14" High Intensity Red or Amber LED Digits	Displays 0-99.	Displays 0-99.	Displays 0-99.
<b>ERRORS</b> 14" High Intensity Red or Amber LED Digits	Displays 0-9.	Displays 0-9.	Displays 0-9.
<b>AT BAT</b> 18" High Intensity Red or Amber LED Digits	Displays 0-99.	Displays 0-99.	Displays 0-99.
<b>BALL</b> 18" High Intensity Red or Amber LED Digits	Displays Blank-9.	Displays Blank-9.	Displays Blank-9.
<b>STRIKE</b> 18" High Intensity Red or Amber LED Digits	Displays Blank-9.	Displays Blank-9.	Displays Blank-9.
<b>OUT</b> 18" High Intensity Red or Amber LED Digits	Displays Blank-9.	Displays Blank-9.	Displays Blank-9.
<b>H OR E</b> 18" High Intensity Red or Amber LED Digits	Displays the letter H for hit or the letter E for error.	Displays the letter H for hit or the letter E for error.	Displays the letter H for hit or the letter E for error.
<b>PITCH COUNT</b>	N/A	Supported. Integrates with PCD display. Controlled by hand-held switches.	Supported. Integrates with PCD display. Requires Pitch Count MPCX <sub>2</sub> control.
<b>PITCH TIMER</b>	N/A	Supported. Integrates with 9520 display. Controlled by hand-held switches.	Supported. Integrates with 9520 display. Requires SCD/DGT MPCX <sub>2</sub> control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size 24'L x 8'H x 8"D (7.32 x 2.44 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 570 lbs. (259 kg) or 632 lbs. (287 kg) with ETNs.

**CAPTIONS:** HOME, GUESTS, AT BAT, BALL, STRIKE, OUT, H, E, white letters 15" high. All other captions white letters 8" high. (HOME and GUESTS are omitted when ordered with ETNs.)

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**POWER WITH ETNS:** 120 VAC, 4.1 Amps, 50/60 Hz. / 240 VAC, 2.1 Amps, 50/60 Hz. Requires earth ground.

**POWER WITHOUT ETNS:** 120 VAC, 3.0 Amps, 50/60 Hz. / 240 VAC, 1.5 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [WWW.NEVCO.COM/INFO/GUARANTEE.PHP](http://WWW.NEVCO.COM/INFO/GUARANTEE.PHP)  
**U.S. SERVICE:** 1-800-851-4040. **INTERNATIONAL SERVICE:** 1-618-664-0360. **CANADA SERVICE:** 1-800-461-8550.



BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:  
[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360  
 FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)