





MODEL 1617-PC




Size: 16' x 7' x 8" (4.88 x 2.13 x .20 meters)

Approximate hanging weight: 390 lbs. (177 kg) **With ETNs:** 445 lbs. (202 kg)

Digit Size: 18"/14" **Digit Color:** High Intensity Red, Amber, or Translucent White

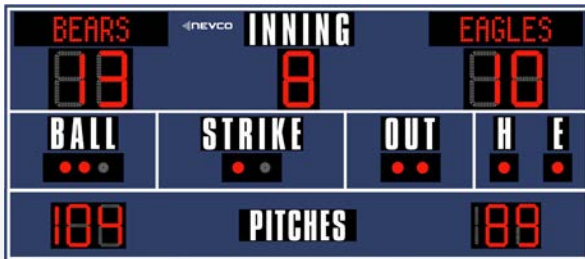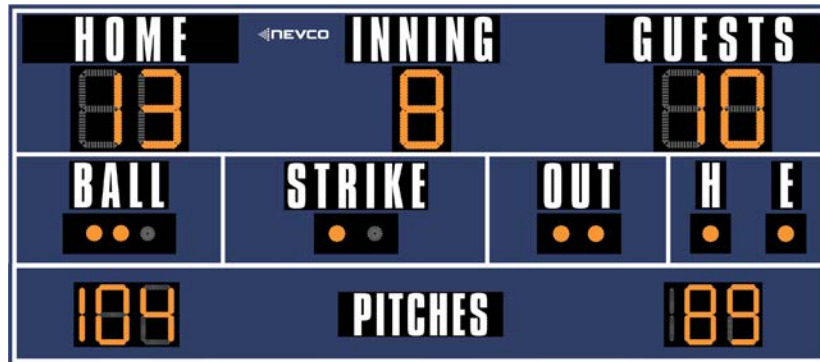

SHOWN WITH OPTIONAL ELECTRONIC TEAM NAMES

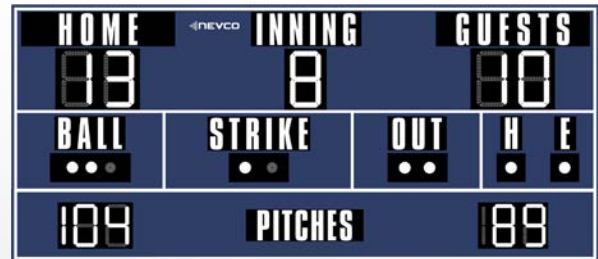

SHOWN WITH OPTIONAL WHITE LEDS

Smaller scoreboard designed for combination Baseball/Softball facilities.

- Designed to withstand wind load speed zones exceeding 180 mph.
- Operate wired or wireless.
- Includes Hit and Error Indicators.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Flush sign mounting.
- Flexible mounting. Can mount directly to columns OR on laterals for complex or retro-fit installations.
- Conveniently tracks pitches for home and guest teams.

Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard



MAXIMIZE YOUR IMPACT®

VISIT US ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS



Model 1617-PC (Outdoor) Baseball/Softball Scoreboard

SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 1617-PC	MPCW-7	MPCX ₂ WIRELESS
TEAM SCORES 1.8" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99
INNING 1.8" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9
INDICATORS 3" diameter High Intensity Red, Amber, or Translucent White LED cluster	THREE FOR BALL TWO FOR STRIKE TWO FOR OUT ONE FOR HIT ONE FOR ERROR	THREE FOR BALL TWO FOR STRIKE TWO FOR OUT ONE FOR HIT ONE FOR ERROR
PITCH COUNT	Display 0-199	Displays 0-199 Requires Pitch Count MPCX ₂ Control
PITCH TIMER	Supported. Integrates with 9620 display. Controlled by hand-held switches.	Supported. Integrates with 9620 display. Requires SCD/DGT MPCX ₂ control.

* When operating scoreboard with an MPCX₂, both baseball/softball & pitch count MPCX₂ controllers are required. Cannot operate this scoreboard with an MPCW7 & MPCX₂ at the same time.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 16'L x 7'H x 8"D (4.88 x 2.13 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 390 lbs. (177 kg) or 445 lbs. (202 kg) with ETNs.

CAPTIONS: HOME, GUESTS, INNING, BALL, STRIKE, OUT, H, PITCHES, E, white letters 10" high. (HOME and GUESTS are omitted when ordered with ETNs.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

BUILT-IN LIGHTNING PROTECTION: All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

POWER WITH ETNS (RED/AMBER): 120 VAC, 2.3 Amps, 50/60 Hz. / 240 VAC, 1.2 Amps, 50/60 Hz. Requires earth ground.

POWER WITHOUT ETNS (RED/AMBER): 120 VAC, 1.1 Amps, 50/60 Hz. / 240 VAC, 0.6 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS (WHITE): 120 VAC, 2.8 Amps, 50/60 Hz. / 240 VAC, 1.4 Amps, 50/60 Hz. Requires earth ground.

POWER WITHOUT ETNS (WHITE): 120 VAC, 1.9 Amps, 50/60 Hz. / 240 VAC, 1.0 Amps, 50/60 Hz. Requires earth ground.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION/

U.S. SERVICE: 1-800-851-4040

INTERNATIONAL SERVICE: 1-618-664-0360

CANADA SERVICE: 1-800-461-8550



MAXIMIZE YOUR IMPACT®

VISIT US ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM