






MODEL 1630

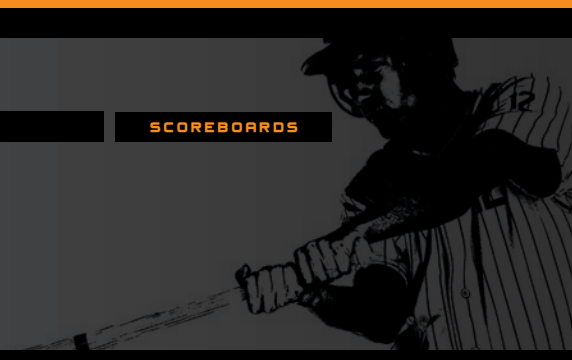


Size: 18' x 8' x 8" (5.49 x 2.44 x .20 meters)

Approximate hanging weight: 420 lbs. (191 kg) **With ETNs:** 482 lbs. (219 kg)

Digit Size: 24" **Digit Color:** High Intensity Red, Amber, or Translucent White

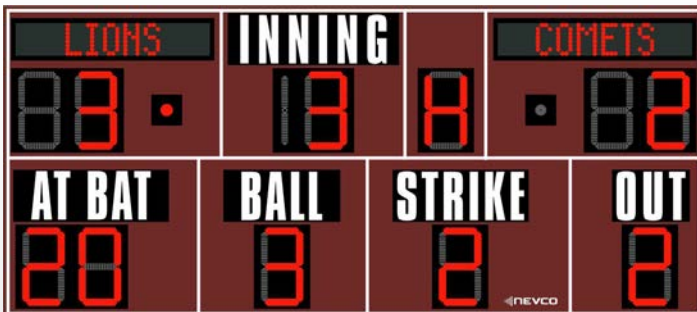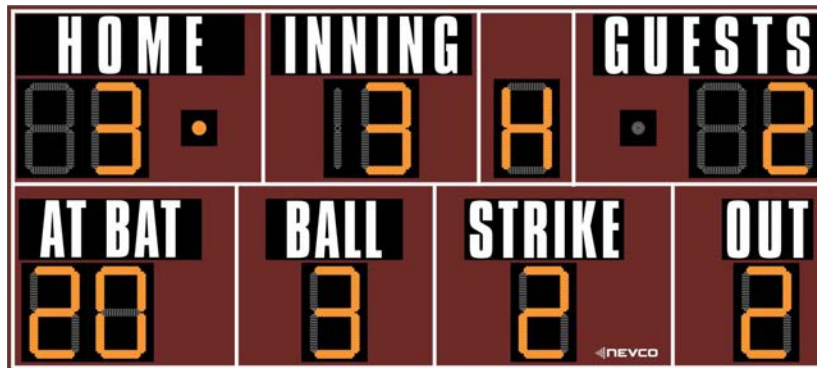

SHOWN WITH OPTIONAL ELECTRONIC TEAM NAMES

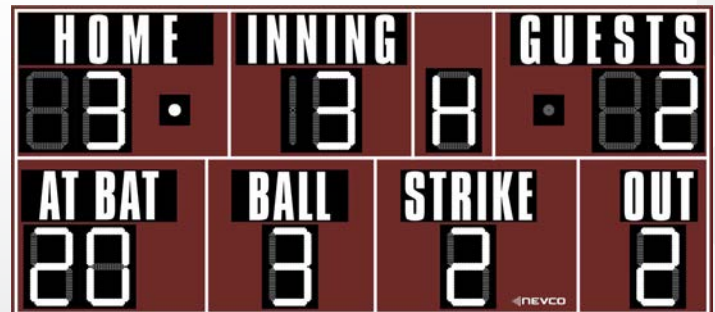

SHOWN WITH OPTIONAL WHITE LEDS

Scoreboard designed for combination Baseball/Softball facilities.

- Designed to withstand wind load speed zones exceeding 150 mph.
- Operate wired or wireless.
- Includes Hit and Error Indicator.
- Large digits easily seen from long distances.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Flush sign mounting.

* Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS




Model 1630 (Outdoor) Baseball/Softball Scoreboard

SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 1630	MPC WIRED	MPCW WIRELESS	MPCX ₂ WIRELESS
TEAM SCORES 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9.	Displays 0-9.	Displays 0-9.
INNING 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-19.	Displays 0-19.	Displays 0-19.
AT BAT 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99.	Displays 0-99.	Displays 0-99.
BALL 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays Blank-9.	Displays Blank-9.	Displays Blank-9.
STRIKE 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays Blank-9.	Displays Blank-9.	Displays Blank-9.
OUT 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays Blank-9.	Displays Blank-9.	Displays Blank-9.
H OR E 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays the letter H for hit or the letter E for error.	Displays the letter H for hit or the letter E for error.	Displays the letter H for hit or the letter E for error.
TEAM AT BAT INDICATORS 24" High Intensity Red, Amber, or Translucent White LED Digits	One for HOME. One for GUESTS.	One for HOME. One for GUESTS.	One for HOME. One for GUESTS.
PITCH COUNT	N/A	Supported. Integrates with PCD display. Controlled by hand-held switches.	Supported. Integrates with PCD display. Requires Pitch Count MPCX ₂ control.
PITCH TIMER	N/A	Supported. Integrates with 9520 display. Controlled by hand-held switches.	Supported. Integrates with 9520 display. Requires SCD/DGT MPCX ₂ control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 18'L x 8'H x 8"D (5.49 x 2.44 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Four (4) brackets provided for mounting. Hanging weight approximately 420 lbs. (191 kg) or 482 lbs. (219 kg) with ETNs.

CAPTIONS: HOME, GUESTS, INNING, AT BAT, BALL, STRIKE, OUT, white letters 15" high. (HOME and GUESTS are omitted when ordered with ETNs.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

POWER WITH ETNS (RED/AMBER): 120 VAC, 3.1 Amps, 50/60 Hz. / 240 VAC, 1.6 Amps, 50/60 Hz. Requires earth ground.

POWER WITHOUT ETNS (RED/AMBER): 120 VAC, 2.0 Amps, 50/60 Hz. / 240 VAC, 1.0 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS (TRANSLUCENT WHITE): 120 VAC, 4.5 Amps, 50/60 Hz. / 240 VAC, 2.2 Amps, 50/60 Hz. Requires earth ground.

POWER WITHOUT ETNS (TRANSLUCENT WHITE): 120 VAC, 3.4 Amps, 50/60 Hz. / 240 VAC, 1.7 Amps, 50/60 Hz. Requires earth ground.

BUILT-IN LIGHTNING PROTECTION: All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION/

U.S. SERVICE: 1-800-851-4040

INTERNATIONAL SERVICE: 1-618-664-0360

CANADA SERVICE: 1-800-461-8550

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 **INTERNATIONAL:** 618-664-0360

FAX: 618-664-0398 **E-MAIL:** INFO@NEVCO.COM



MAXIMIZE YOUR IMPACT®