



BASKETBALL

SCOREBOARDS


MODEL 2712



Size: 10' x 5' x 8" (3.05 x 1.52 x .20 meters)

Approximate hanging weight: 112 lbs. (51 kg)

Digit Size: 13"/9" **Digit Color:** High Intensity Red & Amber

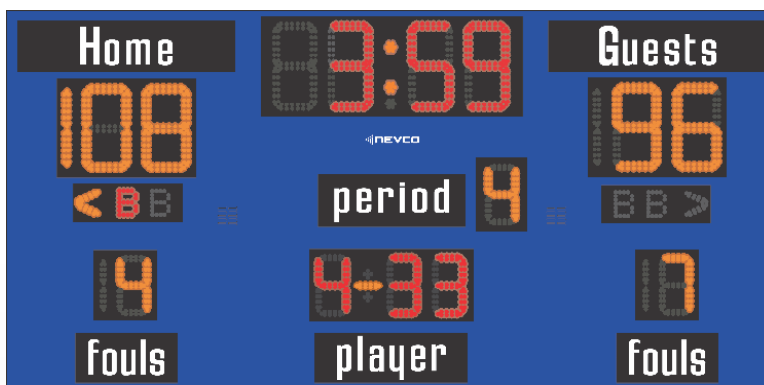

Advanced timing features ideal for Basketball/Volleyball/Wrestling Facilities.

- Indoor multi-sport scoreboard with player/foul data.
- Ability to retrofit team name caption plates.
- Bright, long lasting LED lamp banks when ordered with rear-lit team names.
- Large, 4" Bonus, Double Bonus and Possession Indicator digits included.
- Durable and lightweight cabinet design.
- Universal—syncs with Nevco accessories.
- Extended advertising opportunities.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- Built-in Power Factor Correction.
- Includes basketball caption plates. Volleyball and wrestling caption plates are optional and can be retrofitted.
- Soccer available with MPCX₂ and MPC7 series controls.
- Energy-efficient LEDs reduce power consumption and operating expense.



Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:
WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS




Model 2712 (Indoor) Basketball Scoreboard

SCOREBOARD/CONTROL OPERATING FEATURES

| MODEL 2712 | MPC WIRED | MPCW WIRELESS | MPCX ₂ WIRELESS |
|--|--|--|---|
| TIMING 13" High Intensity Red LED Digits | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute. | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute. | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute. |
| TEAM SCORES 13" High Intensity Amber LED Digits | Displays 0-199 | Displays 0-199 | Displays 0-199 |
| PERIOD 9" Super Bright Amber LED Digits | Displays 0-9 | Displays 0-9 | Displays 0-9 |
| PLAYER/FOUL 9" High Intensity Red LED Digits | Displays 0-99 for player number and 0-9 for personal fouls. | Displays 0-99 for player number and 0-9 for personal fouls. | Displays 0-99 for player number and 0-9 for personal fouls. |
| TEAM FOULS 9" High Intensity Amber LED Digits | Displays 0-19 for each team. | Displays 0-19 for each team. | Displays 0-19 for each team. |
| NEXT POSSESSION SERVE ADVANTAGE High Intensity Amber LED | Displays arrow for each team. | Displays arrow for each team. | Displays arrow for each team. |
| BONUS/DOUBLE BONUS High Intensity Red LED | Displays the letter "B" for each team | Displays the letter "B" for each team | Displays the letter "B" for each team |
| TIME OF DAY | In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". "Time of day" can still display after control turned off. | In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". "Time of day" can still display after control turned off. | "Time of day" can display after control turned off. |
| HORN Two located in scoreboard | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. |
| JUNCTION BOXES | Two (2) 4"x 2 1/8" x 2 1/8" with covers, furnished per scoreboard for installation. | N/A | N/A |
| CONTROL CABLE | One (1) length required of 2-WIRE (coaxial type) 3/4" diameter. Order length required. | N/A | N/A |
| SEGMENT TIMING | Supported. | Supported. | Requires MPCX ₂ segment timer control. |

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 10'L x 5'H x 8"D (3.05 x 1.5 x .20 meters), constructed of aluminum. Hanging weight approximately 112 lbs (51 kg).

CAPTIONS: HOME, GUESTS, PERIOD, white 6" high. (HOME and GUESTS are omitted when ordered with ETNs.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

POWER WITHOUT ETNS: 120 VAC, .6 Amps, 50/60 Hz. / 240 VAC, .3 Amps, 50/60 Hz. Requires earth ground.

POWER WITH REAR-LIT CAPTIONS: 120 VAC, .73 Amps, 50/60 Hz. / 240 VAC, .37 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS: 120 VAC, .81 Amps, 50/60 Hz. / 240 VAC, .41 Amps, 50/60 Hz. Requires earth ground.

POWER WITH REAR-LIT CAPTIONS AND ETNS: 120 VAC, .88 Amps, 50/60 Hz. / 240 VAC, .45 Amps, 50/60 Hz. Requires earth ground.

BUILT-IN LIGHTNING PROTECTION: All models feature optical isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: WWW.NEVCO.COM/INFO/GUARANTEE.PHP

U.S. SERVICE: 1-800-851-4040. **INTERNATIONAL SERVICE:** 1-618-664-0360. **CANADA SERVICE:** 1-800-461-8550.

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM



MAXIMIZE YOUR IMPACT™