



**BASKETBALL**

**SCOREBOARDS**


# MODEL 2745



**Size:** 20' x 5' x 8" (6.10 x 1.52 x .20 meters)

**Approximate hanging weight:** 254 lbs. (115 kg)

**Digit Size:** 18"/ 13" **Digit Color:** High Intensity Red & Amber

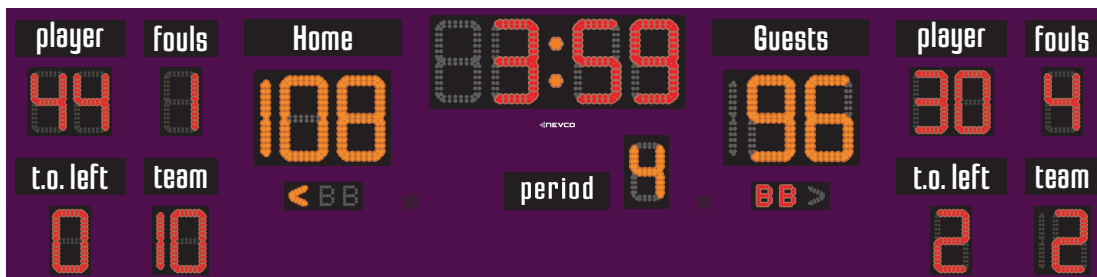

## Advanced timing features ideal for Basketball Facilities.

- Energy-efficient LEDs reduce power consumption and operating expense.
- Ability to retrofit team name caption plates.
- Bright, long lasting LED lamp banks when ordered with rear-lit team names.
- Large, 4" Bonus, Double Bonus and Possession Indicator digits included.
- Durable and lightweight cabinet design.
- Universal—syncs with Nevco accessories.
- Extended advertising opportunities.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- Built-in Power Factor Correction.



**ELECTRONIC TEAM NAMES  
FIELD UPGRADABLE, SO YOU  
CAN UPGRADE NOW OR LATER!**

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



**BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:  
WWW.NEVCO.COM**

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360  
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

# INTEGRATED DISPLAY AND SCORING SOLUTIONS




## Model 2745 (Indoor) Basketball Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 2745	MPC WIRED	MPCW WIRELESS	MPCX <sub>2</sub> WIRELESS
<b>TIMING</b> 18" High Intensity Red LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.
<b>TEAM SCORES</b> 18" High Intensity Amber LED Digits	Displays 0-199	Displays 0-199	Displays 0-199
<b>PERIOD</b> 13" High Intensity Amber LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>NEXT POSSESSION</b> High Intensity Amber LED	Displays arrow for each team.	Displays arrow for each team.	Displays arrow for each team.
<b>BONUS/DOUBLE BONUS</b> High Intensity Red LED	Displays the letter "B" for each team.	Displays the letter "B" for each team.	Displays the letter "B" for each team.
<b>TIME OUTS LEFT</b> 13" High Intensity Red LED Digits	Displays 0-9 for each team.	Displays 0-9 for each team.	Displays 0-9 for each team.
<b>PLAYER</b> 13" High Intensity Red LED Digits	Displays 0-99 for player number.	Displays 0-99 for player number.	Displays 0-99 for player number.
<b>FOULS</b> 13" High Intensity Red LED Digits	Displays 0-9 for each player.	Displays 0-9 for each player.	Displays 0-9 for each player.
<b>TEAM FOULS</b> 13" High Intensity Red LED Digits	Displays 0-19 for each team.	Displays 0-19 for each team.	Displays 0-19 for each team.
<b>TIME OF DAY</b> Two located in scoreboard	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". "Time of day" can still display after control turned off.	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". "Time of day" can still display after control turned off.	"Time of day" can display after control turned off.
<b>HORN</b> Two located in scoreboard	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.
<b>JUNCTION BOXES</b>	Two (2) 4" x 2 1/8" x 2 1/8" with covers, furnished per scoreboard for installation.	N/A	N/A
<b>CONTROL CABLE</b>	One (1) length required of 2-WIRE (coaxial type) 3/4" diameter. Order length required.	N/A	N/A
<b>SEGMENT TIMING</b>	Supported.	Supported.	Requires MPCX <sub>2</sub> segment timer control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size 20'L x 5'H x 8"D (6.10 x 1.52 x .20 meters), constructed of aluminum. Hanging weight approximately 254 lbs. (115 kg).

**CAPTIONS:** HOME, GUESTS, FOULS, PLAYER, T.O. LEFT, TEAM and PERIOD, white 6" high. (HOME and GUESTS are omitted when ordered with ETNs.)

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**ADVERTISING PANEL:** Non-illuminated slide-in panel provided, painted white approximate viewng area 124" W x 11" H. Imprinting available.

**POWER WITHOUT ETNS:** 120 VAC, .89 Amps, 50/60 Hz. / 240 VAC, .45 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH REAR-LIT CAPTIONS:** 120 VAC, 1.2 Amps, 50/60 Hz./ 240 VAC, .6 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH ETNS:** 120 VAC, 1.2 Amps, 50/60 Hz / 240 VAC, .61 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH REAR-LIT CAPTIONS AND ETNS:** 120 VAC, 1.41 Amps, 50/60 Hz / 240 VAC, .71 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature optical isolation circuitry providing additional protection against lightning strikes.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [NEVCO.COM/WARRANTY-LIMITATION](http://NEVCO.COM/WARRANTY-LIMITATION)

**U.S. SERVICE: 1-800-851-4040**

**INTERNATIONAL SERVICE: 1-618-664-0360**

**CANADA SERVICE: 1-800-461-8550**



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)