




MODEL 7605

Size: 24' x 10' 6" x 8" (7.32 x 3.20 x .20 meters)


Approximate hanging weight: 730 lbs. (331 kg) **with ETNs:** 792 lbs. (359 kg)

Digit Size: 24" **Digit Color:** High Intensity Red or Amber

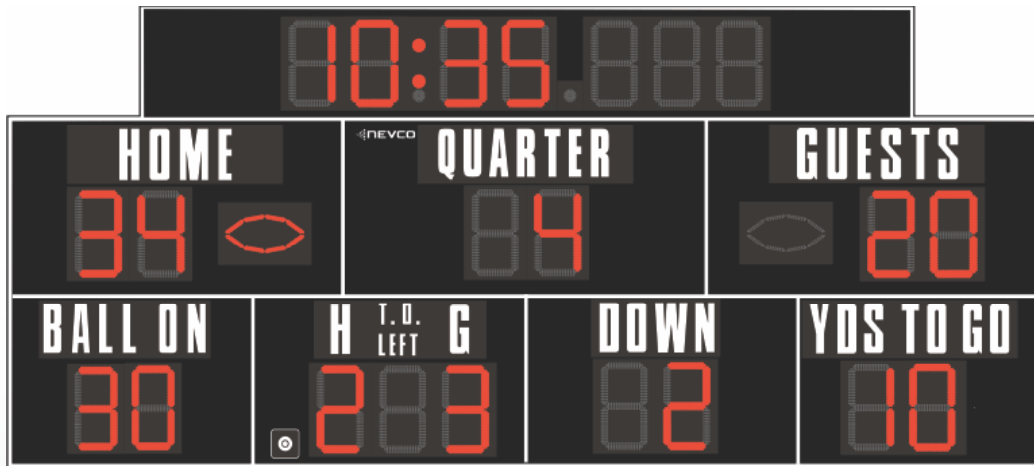

Advanced timing features ideal for combination Football, Baseball, Softball, Soccer, Lacrosse, Field Hockey and Track facilities.

- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Large digits easily seen from long distances.
- Designed to withstand wind load speed zones exceeding 150 mph.
- Includes Possession Indicators and built-in Horn.
- White outline striping separates features for greatest readability.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- When operating as a track board, the 1/1000th of a second displays.
- All 7600 Series models are compatible with third-party timing systems.
- Flexible mounting. Can mount directly to columns OR on laterals for complex or retro-fit installation.

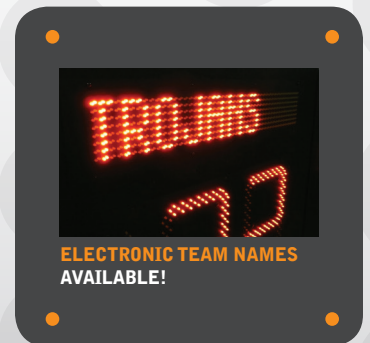

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS




Model 7605 (Outdoor) Football Scoreboard

SCOREBOARD/CONTROL OPERATING FEATURES

| MODEL 7605 | MPC(W)-4/5/6 | MPCW-7 | MPCX ₂ WIRELESS |
|--|--|--|--|
| TIMING 24" High Intensity Red or Amber LED Digits | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.999. 1/1000th seconds display during final minute. | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.999. 1/1000th seconds display during final minute. | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.999. 1/1000th seconds display during final minute. |
| TEAM SCORES 24" High Intensity Red or Amber LED Digits | Displays 0-99 | Displays 0-99 | Displays 0-99 |
| PERIOD 24" High Intensity Red or Amber LED Digits | Displays 0-9 | Displays 0-9 | Displays 0-9 |
| DOWN 24" High Intensity Red or Amber LED Digits | Displays 0-9 | Displays 0-9 | Displays 0-9 |
| TIME OUTS LEFT 24" High Intensity Red or Amber LED Digits | Displays 0-9 | Displays 0-9 | Displays 0-9 |
| YARDS TO GO 24" High Intensity Red or Amber LED Digits | Displays 0-99 | Displays 0-99 | Displays 0-99 |
| BALL ON 24" High Intensity Red or Amber LED Digits | Displays 0-99 | Displays 0-99 | Displays 0-99 |
| BALL POSSESSION INDICATORS High Intensity Red or Amber LED | One for each team shaped in the form of a football. | One for each team shaped in the form of a football. | One for each team shaped in the form of a football. |
| TIME OF DAY | In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". | In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". | N/A |
| HORN | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. |
| JUNCTION BOX | One (1) 4" x 2 1/8" x 2 1/8" with cover, to be installed in dry location (press box), furnished. | N/A | N/A |
| CONTROL CABLE | One (1) length required of 2-WIRE (coaxial type) 3/4" diameter. Order length required. | N/A | N/A |
| SEGMENT TIMING | Supported. | Supported. | Requires MPCX ₂ segment timer control. |

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 24"L x 10' 6"H x 8"D (7.32 x 3.20 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Six (6) brackets provided for mounting. Hanging weight approximately 730 lbs. (331 kg) with ETNs 792 lbs. (359 kg).

CAPTIONS: HOME, GUESTS, PERIOD, BALL ON, DOWN, YDS TO GO, T.O. LEFT white 15" high. (HOME and GUESTS are omitted when ordered with ETNs.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

POWER WITHOUT ETNS: 120 VAC, 4.2 Amps, 50/60 Hz. / 240 VAC, 2.1 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS: 120 VAC, 5.3 Amps, 50/60 Hz. / 240 VAC, 2.7 Amps, 50/60 Hz. Requires earth ground.

BUILT-IN LIGHTNING PROTECTION: All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION/

U.S. SERVICE: 1-800-851-4040

INTERNATIONAL SERVICE: 1-618-664-0360

CANADA SERVICE: 1-800-461-8550

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM



MAXIMIZE YOUR IMPACT®