





# MODEL 7605



**Size:** 24' x 10' 6" x 8" (7.32 x 3.20 x .20 meters)

**Approximate hanging weight:** 730 lbs. (331 kg) **with ETNs:** 792 lbs. (359 kg)

**Digit Size:** 24" **Digit Color:** High Intensity Red, Amber, or Translucent White

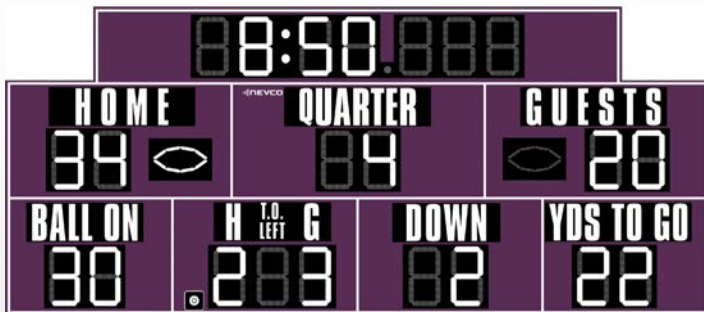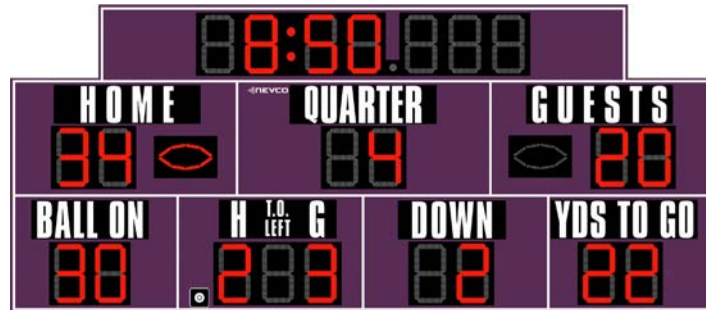

SHOWN WITH OPTIONAL WHITE LEDES



SHOWN WITH OPTIONAL ELECTRONIC TEAM NAMES

### Advanced timing features ideal for combination Football, Baseball, Softball, Soccer, Lacrosse, Field Hockey and Track facilities.

- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Includes Possession Indicators and built-in Horn.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- When operating as a track board, the 1/1000th of a second displays.
- All 7600 Series models are compatible with third-party timing systems.

\*Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)

# INTEGRATED DISPLAY AND SCORING SOLUTIONS




## Model 7605 (Outdoor) Football Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 7605	MPC(W)-4/5/6	MPCW-7	MPCX <sub>2</sub> WIRELESS
<b>TIMING</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.999. 1/1000th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.999. 1/1000th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.999. 1/1000th seconds display during final minute.
<b>TEAM SCORES</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
<b>PERIOD</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>DOWN</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>TIME OUTS LEFT</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>YARDS TO GO</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
<b>BALL ON</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
<b>BALL POSSESSION INDICATORS</b> High Intensity Red, Amber, or Translucent White LED	One for each team shaped in the form of a football.	One for each team shaped in the form of a football.	One for each team shaped in the form of a football.
<b>TIME OF DAY</b>	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	N/A
<b>HORN</b>	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.
<b>JUNCTION BOX</b>	One (1) 4" x 2 1/8" x 2 1/8" with cover, to be installed in dry location (press box), furnished.	N/A	N/A
<b>CONTROL CABLE</b>	One (1) length required of 2-WIRE (coaxial type) 3/4" diameter. Order length required.	N/A	N/A
<b>SEGMENT TIMING</b>	Supported.	Supported.	Requires MPCX <sub>2</sub> segment timer control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size 24" L x 10' 6" H x 8" D (7.32 x 3.20 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Six (6) brackets provided for mounting. Hanging weight approximately 730 lbs. (331 kg) with ETNs 792 lbs. (359 kg).

**CAPTIONS:** HOME, GUESTS, PERIOD, BALL ON, DOWN, YDS TO GO, T.O. LEFT white 1.5" high. (HOME and GUESTS are omitted when ordered with ETNs.)

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**BUILT-IN LIGHTNING PROTECTION:** All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

**POWER WITHOUT ETNS (RED/AMBER):** 120 VAC, 4.2 Amps, 50/60 Hz. / 240 VAC, 2.1 Amps, 50/60 Hz.

Requires earth ground.

**POWER WITH ETNS (RED/AMBER):** 120 VAC, 5.3 Amps, 50/60 Hz. / 240 VAC, 2.7 Amps, 50/60 Hz.

Requires earth ground.

**POWER WITHOUT ETNS (TRANSLUCENT WHITE):** 120 VAC, 7.1Amps, 50/60 Hz. / 240 VAC, 3.6 Amps, 50/60 Hz.

Requires earth ground.

**POWER WITH ETNS (TRANSLUCENT WHITE):** 120 VAC, 8.2 Amps, 50/60 Hz. / 240 VAC, 4.1 Amps, 50/60 Hz.

Requires earth ground.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [NEVCO.COM/WARRANTY-LIMITATION/](http://NEVCO.COM/WARRANTY-LIMITATION/)

**U.S. SERVICE: 1-800-851-4040**

**INTERNATIONAL SERVICE: 1-618-664-0360**

**CANADA SERVICE: 1-800-461-8550**

**BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:**

**WWW.NEVCO.COM**

**U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360**

**FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM**



**MAXIMIZE YOUR IMPACT®**