



FOOTBALL

SCOREBOARDS

# MODEL 7630



**Size:** 24' x 8' x 8" (7.32 x 2.44 x .20 meters)


**Approximate hanging weight:** 590 lbs. (268 kg) **with ETNs:** 652 lbs. (296 kg)

**Digit Size:** 24"/18" **Digit Color:** High Intensity Red or Amber



## Advanced timing features ideal for combination Football, Baseball, Softball, Soccer, Lacrosse, Field Hockey and Track facilities.

- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Large digits easily seen from long distances.
- Designed to withstand wind load speed zones exceeding 150 mph.
- Includes Possession Indicators and built-in Horn.
- White outline striping separates features for greatest readability.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- When operating as a track board, the 1/10th of a second displays.
- All 7600 Series models are compatible with third-party timing systems.
- Flexible mounting. Can mount directly to columns OR on laterals for complex or retro-fit installation.

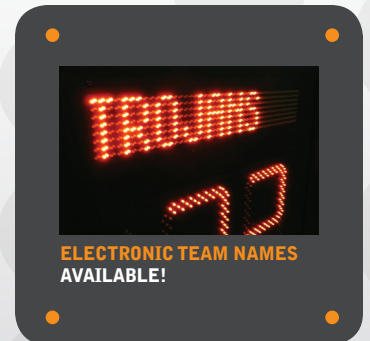

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)

# INTEGRATED DISPLAY AND SCORING SOLUTIONS




## Model 7630 (Outdoor) Football Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 7630	MPC(W)-4/5/6	MPCW-7	MPCX <sub>2</sub> WIRELESS
<b>TIMING</b> 24" High Intensity Red or Amber LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.9. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.9. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59.9. 1/10th seconds display during final minute.
<b>TEAM SCORES</b> 24" High Intensity Red or Amber LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
<b>QUARTER</b> 24" High Intensity Red or Amber LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>DOWN</b> 24" High Intensity Red or Amber LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>YARDS TO GO</b> 24" High Intensity Red or Amber LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
<b>BALL ON</b> 24" High Intensity Red or Amber LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
<b>TIME OUTS LEFT</b> 18" High Intensity Red or Amber LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>BALL POSSESSION INDICATORS</b> High Intensity Red or Amber LED	One for each team shaped in the form of a football.	One for each team shaped in the form of a football.	One for each team shaped in the form of a football.
<b>TIME OF DAY</b>	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	N/A
<b>HORN</b>	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.
<b>JUNCTION BOX</b>	One (1) 4" x 2 1/8" x 2 1/8" with cover, to be installed in dry location (press box), furnished.	N/A	N/A
<b>CONTROL CABLE</b>	One (1) length required of 2-WIRE (coaxial type) 3/4" diameter. Order length required.	N/A	N/A
<b>SEGMENT TIMING</b>	Supported.	Supported.	Requires MPCX <sub>2</sub> segment timer control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size 24'L x 8'H x 8"D (7.32 x 2.44 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Six (6) brackets provided for mounting. Hanging weight approximately 590 lbs. (268 kg) with ETNs 652 lbs. (296 kg).

**CAPTIONS:** HOME, GUESTS, QTR, BALL ON, DOWN, YDS TO GO, white 15" high. T.O.L. (2) white 6" high. (HOME and GUESTS are omitted when ordered with ETNs.)

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**POWER WITHOUT ETNS:** 120 VAC, 3.2 Amps, 50/60 Hz. / 240 VAC, 1.6 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH ETNS:** 120 VAC, 4.4 Amps, 50/60 Hz. / 240 VAC, 2.2 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [WWW.NEVCO.COM/INFO/GUARANTEE.PHP](http://WWW.NEVCO.COM/INFO/GUARANTEE.PHP)

**U.S. SERVICE: 1-800-851-4040. INTERNATIONAL SERVICE: 1-618-664-0360. CANADA SERVICE: 1-800-461-8550.**

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)



MAXIMIZE YOUR IMPACT®