



SOCCER

SCOREBOARDS

MODEL 3602

Size: 12' x 5' x 8" (3.66 x 1.52 x .20 meters)


Approximate hanging weight: 180 lbs. (82 kg) **with ETNs:** 235 lbs. (107 kg)

Digit Size: 18" **Digit Color:** High Intensity Red or Amber



Advanced timing features ideal for Soccer, Football, Field Hockey and Lacrosse facilities.

- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Large digits easily seen from long distances.
- Designed to withstand wind load speed zones exceeding 150 mph.
- Includes built-in horn.
- White outline striping separates features for greatest readability.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- Flexible mounting. Can mount directly to columns OR on laterals for complex or retro-fit installation.

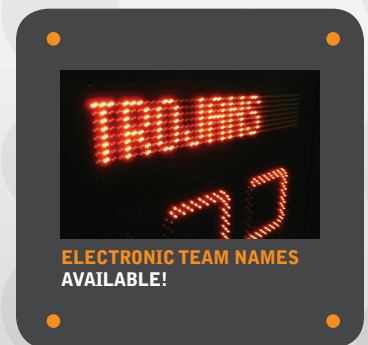

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM



MAXIMIZE YOUR IMPACT™

INTEGRATED DISPLAY AND SCORING SOLUTIONS



Model 3602 (Outdoor) Soccer/Field Hockey/Lacrosse Scoreboard

SCOREBOARD/CONTROL OPERATING FEATURES

| MODEL 3602 | MPC(W)-4/5/6 | MPCW-7 | MPCX ₂ WIRELESS |
|--|--|--|--|
| TIMING 18" High Intensity Red or Amber LED Digits | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute. | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute. | Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute. |
| TEAM SCORES 18" High Intensity Red or Amber LED Digits | Displays 0-99 | Displays 0-99 | Displays 0-99 |
| PERIOD 18" High Intensity Red or Amber LED Digits | Displays 0-9 | Displays 0-9 | Displays 0-9 |
| TIME OF DAY | In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". | In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". | N/A |
| HORN | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. |
| JUNCTION BOX | One (1) 4" x 2 1/8" x 2 1/8" with cover, to be installed in dry location (press box), furnished. | N/A | N/A |
| CONTROL CABLE | One (1) length required of 2-WIRE (coaxial type) 1/4" diameter. Order length required. | N/A | N/A |
| SEGMENT TIMING | Supported. | Supported. | Requires MPCX ₂ segment timer control. |

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 12'L x 5'H x 8"D (3.66 x 1.52 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Four (4) brackets provided for mounting. Hanging weight approximately 180 lbs. (82 kg) with ETNs 235 lbs. (107 kg).

CAPTIONS: HOME, GUESTS, MIN, SEC, PERIOD, white 10" high. (HOME and GUESTS are omitted when ordered with ETNs.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

POWER WITHOUT ETNS: 120 VAC, 1.2 Amps, 50/60 Hz. / 240 VAC, 0.6 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS: 120 VAC, 2.2 Amps, 50/60 Hz. / 240 VAC, 1.1 Amps, 50/60 Hz. Requires earth ground.

BUILT-IN LIGHTNING PROTECTION: All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: WWW.NEVCO.COM/INFO/GUARANTEE.PHP

U.S. SERVICE: 1-800-851-4040. **INTERNATIONAL SERVICE:** 1-618-664-0360. **CANADA SERVICE:** 1-800-461-8550.

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM



MAXIMIZE YOUR IMPACT™