



WRESTLING


SCOREBOARDS

# MODEL 4-FACE 2712

**Size:** Top: 12'9"sq; Bottom: 11'9" sq; Height: 5' (3.93 x 3.60 x 1.52 meters)


**Approximate hanging weight:** 1073 lbs. (487 kg)

**Digit Size:** 13"/ 9" **Digit Color:** High Intensity Red & Amber

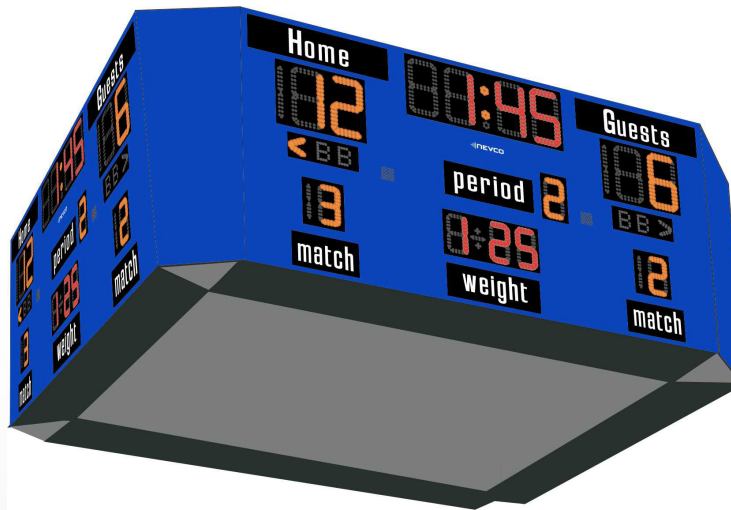

## Advanced timing features ideal for Wrestling/Volleyball/Basketball Facilities.

- Energy-efficient LEDs reduce power consumption and operating expense.
- Ability to retrofit team name caption plates.
- Bright, long lasting LED lamp banks when ordered with rear-lit team names.
- Large, 4" advantage indicator arrows included.
- Durable and lightweight cabinet design.
- Universal—syncs with Nevco accessories.
- Extended advertising opportunities.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- Built-in Power Factor Correction.
- Includes basketball caption plates. Volleyball and wrestling caption plates are optional and can be ordered.
- Soccer available with MPCX<sub>2</sub> and MPC7 series controls.
- Advantage Timer feature included with wrestling captions.

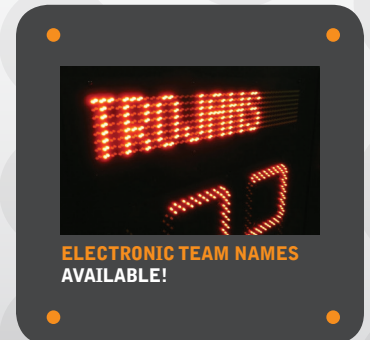

**Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.**

 **NEVCO**  
MAXIMIZE YOUR IMPACT®

**BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:  
WWW.NEVCO.COM**

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360  
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

# INTEGRATED DISPLAY AND SCORING SOLUTIONS



## Model 4-Face 2712 (Indoor) Wrestling Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 4-FACE 2712	MPC WIRED	MPCW WIRELESS	MPCX <sub>2</sub> WIRELESS
<b>TIMING</b> 13" High Intensity Red LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.
<b>TEAM SCORES</b> 13" High Intensity Amber LED Digits	Displays 0-199	Displays 0-199	Displays 0-199
<b>PERIOD</b> 9" High Intensity Amber LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>WEIGHT</b> 9" High Intensity Red LED Digits	Displays 0-99 for player number and 0-9 for personal fouls.	Displays 0-99 for player number and 0-9 for personal fouls.	Displays 0-99 for player number and 0-9 for personal fouls.
<b>MATCH</b> 9" High Intensity Amber LED Digits	Displays 0-19 for each team.	Displays 0-19 for each team.	Displays 0-19 for each team.
<b>ADVANTAGE</b> High Intensity Amber LED	Displays arrow for each team.	Displays arrow for each team.	Displays arrow for each team.
<b>BONUS/DOUBLE BONUS</b> High Intensity Red LED	N/A	N/A	N/A
<b>TIME OF DAY</b>	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". "Time of day" can still display after control turned off.	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". "Time of day" can still display after control turned off.	"Time of day" can display after control turned off.
<b>HORN</b> Two located in scoreboard	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.
<b>JUNCTION BOXES</b>	Two (2) 6"x 6" x 4" with covers, furnished per scoreboard for installation.	N/A	N/A
<b>CONTROL CABLE</b>	One to four (1-4) lengths required of 2-WIRE (coaxial type) 3/4" diameter. Order length required.	N/A	N/A
<b>SEGMENT TIMING</b>	Supported.	Supported.	Requires MPCX <sub>2</sub> segment timer control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size Top: 12'9"sq; Bottom: 11'9"sq; Height: 5' (3.93 x 3.60 x 1.52 meters). Constructed of aluminum, 4-face structure built from powder coated steel. Lifting and mounting brackets provided at each corner for permanent suspension mounting. Hanging weight approximately 1073 lbs. (487 kg).

**CAPTIONS:** HOME, GUESTS, PERIOD, MATCH, WEIGHT, white 6" high. (HOME and GUESTS are omitted when ordered with ETNs.)

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**POWER WITHOUT ETNS (PER SIDE):** 120 VAC, .6 Amps, 50/60 Hz. / 240 VAC, .3 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH REAR-LIT CAPTIONS (PER SIDE):** 120 VAC, .73 Amps, 50/60 Hz./ 240 VAC, .37 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH ETNS (PER SIDE):** 120 VAC, .81 Amps, 50/60 Hz / 240 VAC, .41 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH REAR-LIT CAPTIONS AND ETNS (PER SIDE):** 120 VAC, .88 Amps, 50/60 Hz / 240 VAC, .45 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature optical isolation circuitry providing additional protection against lightning strikes.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [WWW.NEVCO.COM/INFO/GUARANTEE.PHP](http://WWW.NEVCO.COM/INFO/GUARANTEE.PHP)  
**U.S. SERVICE: 1-800-851-4040. INTERNATIONAL SERVICE: 1-618-664-0360. CANADA SERVICE: 1-800-461-8550.**



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:  
**WWW.NEVCO.COM**

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360  
 FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)